



Land Solutions

Sea Solutions

Air Solutions



Vmail  
SMS  
Call  
Signal



# RemoteSAT

## RST100



Voice



RJ11



Data



Tracking




# BEAM

# RemoteSAT

## RST100

- ▶ **RJ11/POTS Connectivity**
- ▶ **Voice/Data/FAX/SMS**
- ▶ **Local & Remote Configuration**

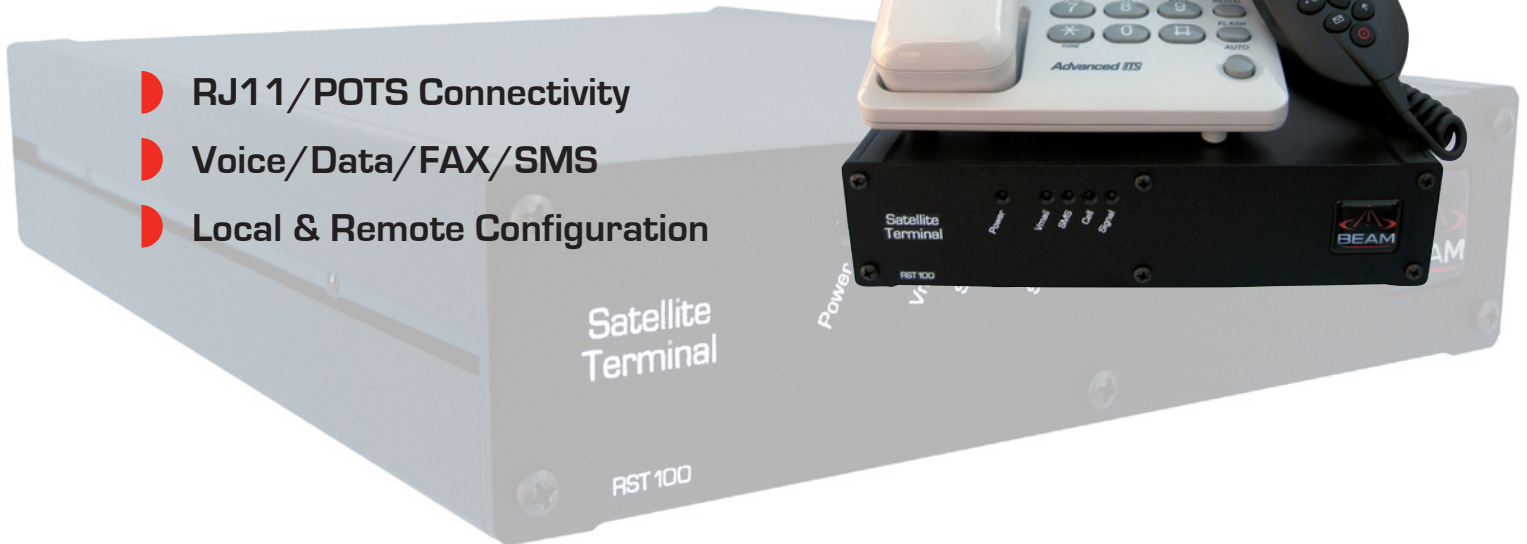


The Beam RST100 is a single-channel intelligent voice and data communication terminal. For use inside a building, motor home, boat, vessel or a fixed site location providing easy satellite communication, utilizing the latest Iridium satellite transceiver, the 9522B.

Voice communications are accessible via the intelligent RJ11/POTS (Plain Old Telephone System) port for using up to 3 standard cordless or corded telephone handsets or for integrating with a PBX system enabling easy access from any handset connected to the PBX.

The optional compact Intelligent Handset with hang up cradle, SMS and phone book features can be used for voice calls. This handset is commonly used in conjunction with standard phone equipment.

The RST100 has an intelligent processor on board for managing an advanced RJ11 port, supporting abbreviated dialling, auto-dial, speed dial, call barring, call logging as well as configurable dial, ring and busy tones that can be set to country specific tones.

Internet, Fax and all the Iridium Data services are supported via the data port on the RST100 RemoteSAT terminal.

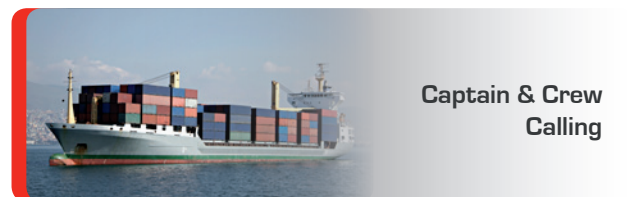

**Captain & Crew Calling**



**Connection to PBX System**



**In-building satellite communications**



**Emergency Services**

## KEY FEATURES

### ▶ **RJ11 / POTS Connectivity**

The RJ11/POTS interface emulates PSTN (Public Telephone Service) features and is equipped with off-hook detection, configurable Ring, Busy & Dial service tones.

### ▶ **9522B Iridium Satellite Transceiver**

The RST100 uses the latest Iridium 9522B transceiver inside the terminal to access the satellite network.

### ▶ **Support Intelligent Compact handset**

The RST100 supports an optional Intelligent Handset for voice calls as well as utilizing the Iridium SMS service. The handset is compact and provides easy access to network status, phonebook and SMS.

### ▶ **Supports Standard Phones**

Voice services can be easily accessed anywhere on earth using a standard telephone handsets. This means voice communications can be easily accessed using standard Corded, Cordless, DECT or PBX systems.

### ▶ **Connect to PABX**

Use of the intelligent RJ11 interface enables the easy integration with a PBX system allowing for multiple user access to satellite calls from any handset connected to a PBX.

### ▶ **Phone Number Processing**

The intelligent number processing is ideal for various applications. Call barring and restricted dialling within certain countries or area codes can also be configured if required. Abbreviated & Speed Dialling is also supported on the terminal.

### ▶ **SSAS Compatible**

Beam RST100 allows the easy connection of a Beam RST030 TrackALERT module.

### ▶ **Voice/DATA/FAX/SMS**

The complete range of Iridium data services allows you to simply and conveniently gain access to Internet, Email, and corporate LAN.

### ▶ **Intelligent Processor & Interface**

The Intelligent processor enables the terminal to be configured remotely or locally. Locally it can be configured with a PC using the Beam Management System (BMS) software supplied with the TrackALERT terminal.

It is also possible to configure and check status of the unit remotely by sending commands to the terminal using SMS.

### ▶ **External Ringer/Alert**

The RST952 ringer/call alert connects simply to the RJ11 port of the terminal and provides an amplified alert with volume, pitch controls as well as an on/off button.

### ▶ **Supports Back up Battery**

The use of an RST050 Beam Battery Back-up is an ideal accessory where guaranteed communication is required, providing 24- hours standby/2-hours talk time.

### ▶ **Fully Approved**

The RST100 is a fully approved product by Iridium Communications Inc.

### ▶ **Fully Certified**

Corrosion / vibration / RoHS  
C, CE, FCC, IEC160945

### ▶ **Power Input**

The RST100 support an 11-32V DC power input. AC/DC power cable is supplied along with an AC 110/240 plug-pack (requires country specific monitor cable) which makes it easy to connect to mains or DC power.



RJ11/POTS



Handsfree  
(Optional)



Data



Voice



Tracking

## TECHNICAL SPECIFICATIONS

### POWER SPECIFICATIONS

|                            |              |         |
|----------------------------|--------------|---------|
| Power input voltage        | 11 - 32 V DC |         |
| Power Consumption ( AMPS ) | 12 V DC      | 24 V DC |
| Stand-by                   | 0.35         | 0.16    |
| Transmit                   | 0.51         | 0.25    |
| Stand-by - inc handset     | 0.47         | 0.22    |
| Transmit - inc handset     | 0.59         | 0.29    |

### ENVIRONMENT SPECIFICATIONS

| Temperature     | Degrees °C   | Degrees °F |
|-----------------|--|------------|
| Operating Range | -15 to +55   | +5 to +131 |
| Storage         | -30 to +70   | -22 to 158 |
| Humidity        | 93% non condensing   |            |
| Vibration       | 2 Hz - 13.2 Hz & 13.2 Hz - 100 hz                          |            |
| Corrosion       | 40 °C with 90% - 95% relative humidity after 2h salt spray |            |

### CONNECTORS/INTERFACES

|                     |                              |
|---------------------|------------------------------|
| Intelligent Handset | RJ45 DPL BUS                 |
| Telephone / POTS    | RJ-11 2 -wire / TN12 or 600? |
| Data Port           | RS232 Serial Interface       |
| Log Port            | RS232 Serial Interface       |
| Power               | 2 Pin screw type             |

### LED/DISPLAY

|           |          |
|-----------|----------|
| Power     | Green    |
| Signal    | 3 Colour |
| Call      | Yellow   |
| Voicemail | Green    |

### PHYSICAL SPECIFICATIONS

|                     | UNIT ONLY        | PACKED            |
|---------------------|------------------|-------------------|
| Dimensions - mm     | 225 x 271 x 45   | 400 x 325 x 90    |
| Dimensions - inches | 8.8 x 10.6 x 1.2 | 15.7 x 12.8 x 3.5 |
| Weight - kg         | 2.25             | 3.25              |
| Weight - lbs        | 4.9              | 7.1               |

### CERTIFICATIONS

|                             |
|-----------------------------|
| IEC60945                    |
| Germanischer Lloyd          |
| American bureau of Shipping |
| Electrical Safety           |
| EMC Compliance              |
| C tick                      |
| CE Compliance               |

### KIT CONTENTS

|                            |
|----------------------------|
| RST100 Main terminal       |
| Mounting Brackets          |
| AC 110/240V Plug Pack      |
| DC 1.5m Power Cable        |
| Data Cable                 |
| User & Installation Manual |

## ACCESSORIES

|        |                                    |
|--------|------------------------------------|
| RST970 | Intelligent Iridium handset        |
| RST030 | TrackALERT Terminal (In-built GPS) |
| RST050 | Battery back-up - 24 hours standby |
| RST973 | In-vehicle handsfree kit           |
| RST932 | 6m Iridium antenna cable           |
| RST933 | 12m Iridium antenna cable          |

|        |   |
|--------|---|
| RST702 | Iridium/GPS dual mode mast antenna  |
| RST705 | Iridium/GPS dual mode magnetic mount antenna (incl. 6m cable for GPS & Iridium) |
| RST710 | Mast antenna  |
| RST715 | Magnetic mount antenna (incl. 5m cable)   |
| RST720 | Bolt mount antenna (incl. 5m cable)   |

APPROVED BEAM RESELLER

[www.beamcommunications.com](http://www.beamcommunications.com)

[www.beamcommunications.com](http://www.beamcommunications.com)



+61 3 8588 4500



+61 3 9560 9055



[info@beamcommunications.com](mailto:info@beamcommunications.com)